

THERMAL

Name



THERMAL i-Oven Pyro

Code


THKOE0IOP

Supply

---- / 220 V

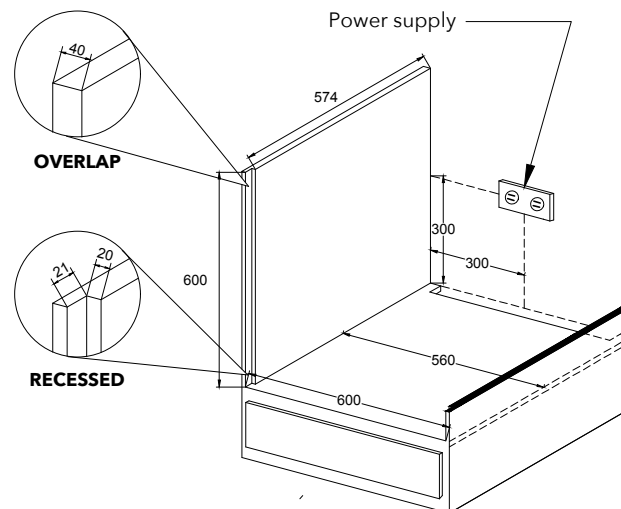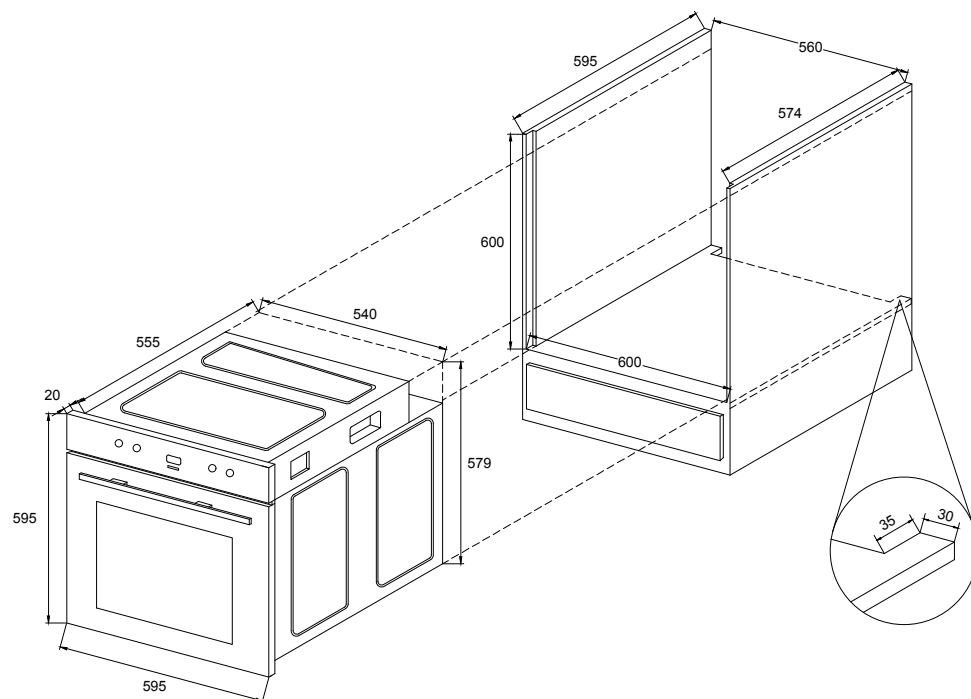


RECESSED INSTALL



UNDERCOUNTER

OVERLAP INSTALL



UNDERCOUNTER

INSTALLATION


The appliance should be installed built in the cabinet. It should be keep safety distance with appliance and the kitchen walls. Detail please check below picture (values in mm).

- Surfaces, synthetic laminates and adhesives used must be heat resistant (100° C minimum), and neighboring unit fronts up to 70° C.
- Kitchen cabinets must be set level and fixed. A gap of 5 mm is required between the appliance and surrounding unit fronts.
- If there is a drawer beneath the oven, a shelf must be installed between oven and drawer.



EQUIPMENT MUST HAVE AN INDEPENDENT KEY THAT WORKS WITH THE CAPACITY OF THE EQUIPMENT.

- 01 THERMO SWITCH - MAGNETIC 2x20A
- 01 DIFFERENTIAL SWITCH

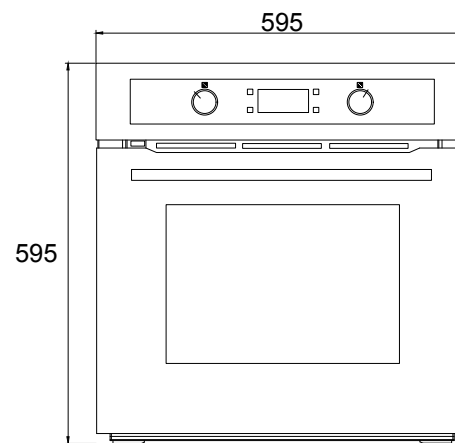

REFERENCE PICTURE