

# THERMAL

**Name**


Horno i-Oven Pyro

**Code**


THKOE0IOP

**Supply**


---- / 220 V

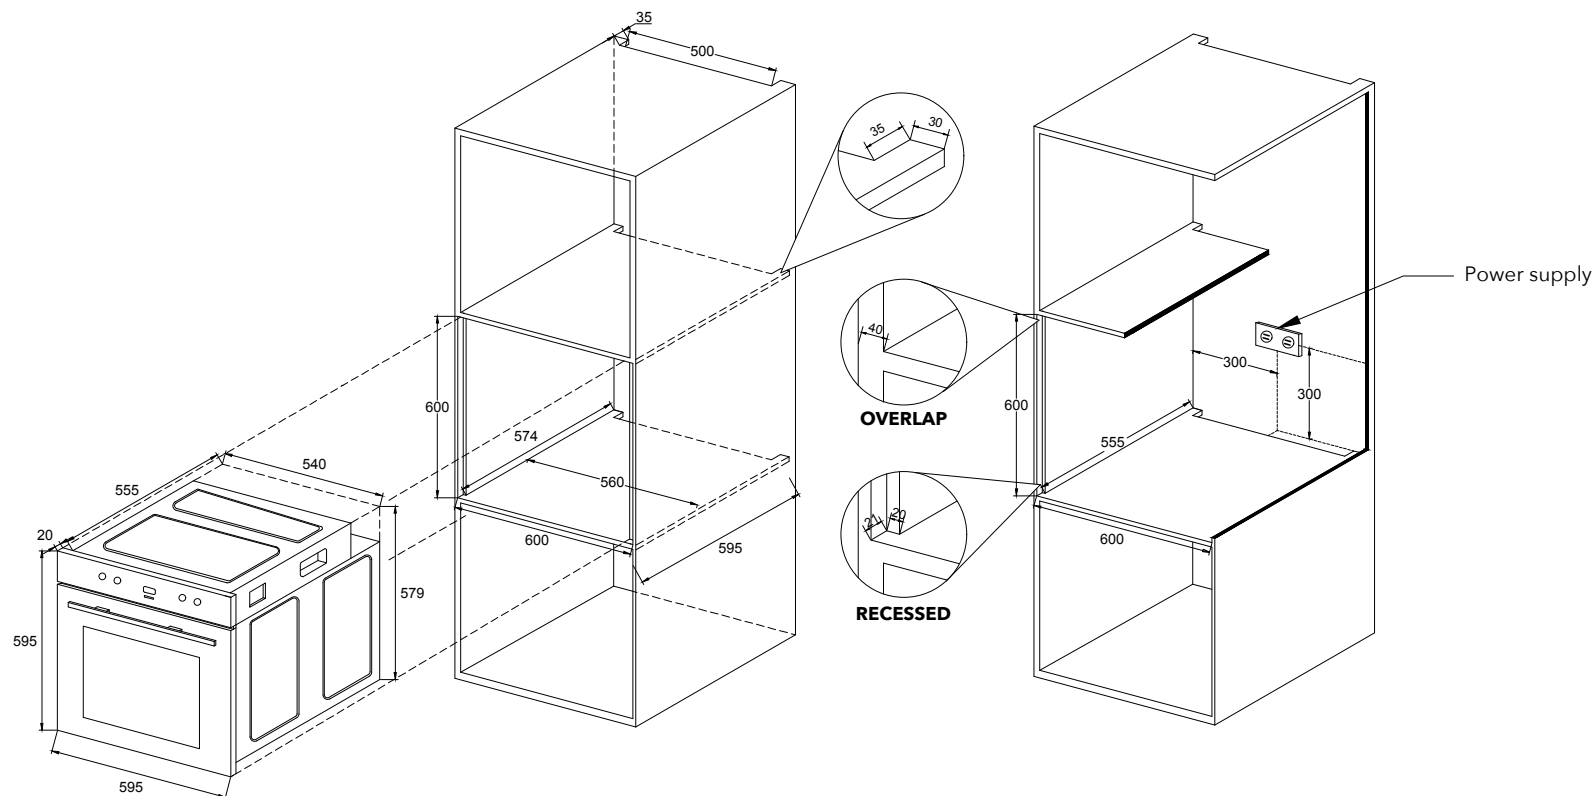

**RECESSED INSTALL**

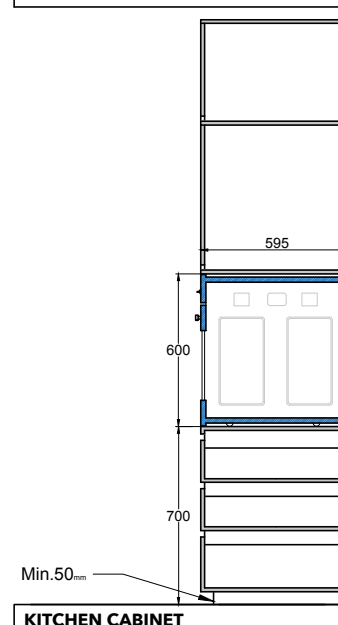

**OVERLAP INSTALL**

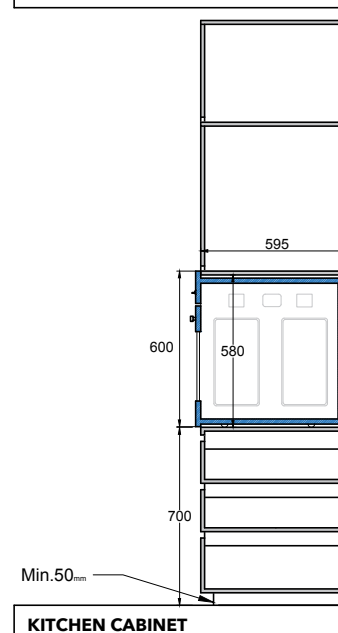

## INSTALLATION


The appliance should be installed built in the cabinet. It should be keep safety distance with appliance and the kitchen walls. Detail please check below picture (values in mm).

- Surfaces, synthetic laminates and adhesives used must be heat resistant(100° C minimum), and neighboring unit fronts up to 70° C.
- Kitchen cabinets must be set level and fixed. A gap of 5 mm is required between the appliance and surrounding unit fronts.
- If there is a drawer beneath the oven, a shelf must be installed between oven and drawer.



**EQUIPMENT MUST HAVE AN INDEPENDENT KEY THAT WORKS WITH THE CAPACITY OF THE EQUIPMENT.**

- 01 THERMO SWITCH - MAGNETIC 2x20A
- 01 DIFFERENTIAL SWITCH

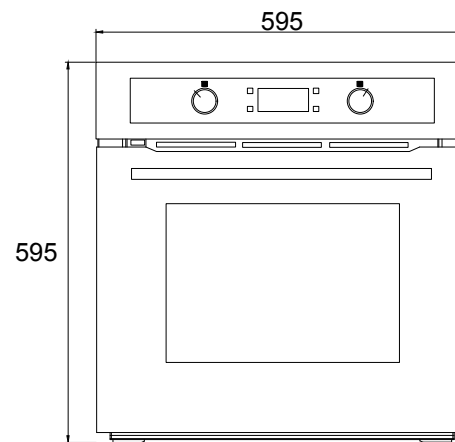

**REFERENCE PICTURE**